



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61K 9/00	A1	(11) International Publication Number: WO 98/17251 (43) International Publication Date: 30 April 1998 (30.04.98)
(21) International Application Number: PCT/US97/18605 (22) International Filing Date: 16 October 1997 (16.10.97) (30) Priority Data: 08/734,519 18 October 1996 (18.10.96) US (71) Applicant (for all designated States except US): VIROTEX CORPORATION [US/US]; Suite 350, 4200 Research Forest Drive, The Woodlands, TX 77381 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): TAPOLSKY, Gilles, H. [FR/US]; 62 South Piney Plains, The Woodlands, TX 77382 (US). OSBORNE, David, W. [US/US]; 19 Quiet Oak Circle, The Woodlands, TX 77381 (US). (74) Agent: PORTER, Gregory, L.; Arnold, White & Durkee, P.O. Box 4433, Houston, TX 77210 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: PHARMACEUTICAL CARRIER DEVICE SUITABLE FOR DELIVERY OF PHARMACEUTICAL COMPOUNDS TO MUCOSAL SURFACES (57) Abstract <p>The present invention relates to a pharmaceutical delivery device for application of a pharmaceutical to mucosal surfaces. The device comprises an adhesive layer and a non-adhesive backing layer, and the pharmaceutical may be provided in either or both layers. Upon application, the device adheres to the mucosal surface, providing localized drug delivery and protection to the treatment site. The kinetics of erodability are easily adjusted by varying the number of layers and/or the components.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

PHARMACEUTICAL CARRIER DEVICE SUITABLE FOR DELIVERY OF PHARMACEUTICAL COMPOUNDS TO MUCOSAL SURFACES

FIELD OF THE INVENTION

The present invention relates generally to a water-erodable pharmaceutical carrier which adheres to mucosal surfaces for the localized delivery of pharmaceutical compounds and protection of the treatment site.

BACKGROUND OF THE INVENTION

The localized treatment of body tissues, diseases, and wounds requires that the particular pharmaceutical component be maintained at the site of treatment for an effective period of time. Given the tendency of natural bodily fluids to rapidly wash away topically applied pharmaceutical components, the topical treatment of wet mucosal tissues has been problematic. In the mouth, saliva, natural replacement of the mucosal tissue, as well as, eating, drinking, and speaking movements are some of the problems that have limited the effectiveness and residence time of pharmaceutical carriers.

Bioadhesive carriers are known in the art and include gels, pastes, tablets, and films. These products, however, may lack one or several of the preferred characteristics for an efficient and commercially acceptable pharmaceutical delivery device. Some characteristics which are preferred by users of bioadhesive carriers include water-erodability; ease of handling and application to the treatment site; ease of comfort; minimal foreign body sensation; and unidirectional, specific release into the mucosal tissue. Other preferred characteristics for an effective and user-friendly product for the treatment of mucosal surfaces include the use of pharmaceutically approved components or materials; instantaneous adhesion to mucosal surface upon application; increased residence time for the protection of the affected tissue or the delivery of the pharmaceutical component; and ease of removal of the delivery device from the affected tissue or natural erosion of the delivery device at the delivery site.

- 2 -

Bioadhesive gels which are used for application to mucosal tissues and especially the oral cavity are known in the art. For example, U.S. Patent No. 5,192,802 describes a bioadhesive teething gel made from a blend of sodium carboxymethyl cellulose and xanthan gum. The gel may also have potential use in the treatment of canker sores, fever blisters, and hemorrhoids. However, this type of pharmaceutical carrier has a very limited residence time, given that body fluids such as saliva quickly wash it away from the treatment site. Bioadhesive gels are also described in U.S. Patent Nos. 5,314,915; 5,298,258; and 5,642,749. The gels described in those patents use an aqueous or oily medium and different types of bioadhesive and gelling agents.

Denture adhesive pastes are another type of bioadhesive product known in the art. However, these preparations are used primarily for their adhesive properties, to adhere dentures to the gums, rather than for the protection of tissue or for the topical delivery of pharmaceuticals, although drugs such as local anesthetics may be used in the paste for the relief of sore gums. U.S. Patent Nos. 4,894,232 and 4,518,721 describe denture adhesive pastes. The '721 Patent describes a combination of sodium carboxymethyl cellulose and polyethylene oxide in polyethylene glycol.

Pastes have also been used as film protectants and as drug delivery systems. One such example having film forming and adhesive properties is the product commercialized under the name Orabase®-B, which is a thick gel or paste for the relief of mouth sores. Ingredients include guar gum, sodium carboxymethyl cellulose, tragacanth gum, and pectin. Even though it does provide numbing to the area of application, the film forming behavior and bioadhesion do not last. Thus, this product has a limited residence time.

Bioadhesive tablets are described in U.S. Patent No. 4,915,948. The water-soluble bioadhesive material used in this device is a xanthan gum or a pectin combined with an adhesion enhancing material such as a polyol. Although residence time is improved with the use of bioadhesive tablets, they are not user friendly, especially when used in the oral cavity, given the unpleasant feelings associated with their solidity, bulkiness, and slow erosion time.

- 3 -

Bioadhesive tablets are also described in U.S. Patent Nos. 4,226,848; 4,292,299; and 4,250,163, and are single layer or bilayer devices having an average thickness of 0.2 to 2.5 mm. The bioadhesive tablets described in these patents utilize a non-adhesive component such as cellulose ether, a bioadhesive component such as polyacrylic acid, sodium
5 carboxymethyl cellulose, or polyvinylpyrrolidone, and a binder for tableting purposes. The cellulose derivatives may or may not be water-erodable.

The use of bandages or bioadhesive laminated films, which are thinner and flexible and therefore have a decreased foreign body sensation, is described in U.S. Patent Nos. 3,996,934 and 4,286,592. These products are used to deliver drugs through the skin or
10 mucous. The laminated films usually include an adhesive layer, a reservoir layer, and a backing layer. Bioadhesive devices designed to release drug through the skin at a given rate and over a period of time are usually not water soluble, and thus are not dissolved or washed away by bodily fluids.

In addition to film systems for the delivery of drug through the skin, film delivery
15 systems for use on mucosal surfaces are also known. These types of systems, which are water-insoluble and usually in the form of laminated, extruded or composite films, are described in U.S. Patent Nos. 4,517,173; 4,572,832; 4,713,243; 4,900,554; and 5,137,729. The '173 Patent describes and claims a membrane-adhering film consisting of at least three layers, including a pharmaceutical layer, a poor water soluble layer, and an intermediate
20 layer. The pharmaceutical layer includes the drug and a cellulose derivative selected from hydroxypropyl cellulose, methyl cellulose, and hydroxypropyl methyl cellulose. The poor water soluble layer is made by the combination of one or more cellulose derivatives with a poor water soluble fatty acid, and the intermediate layer is made of cellulose derivatives. The '832 Patent relates to a soft film for buccal delivery, made by the combined use of a water
25 soluble protein, a polyol, and a polyhydric alcohol such as cellulose and polysaccharides, and also teaches the use of coloring or flavoring agents. The '243 Patent describes a single or multi-layered bioadhesive thin film made from 40-95% water soluble hydroxypropyl cellulose, 5-60% water-insoluble ethylene oxide, 0-10% water-insoluble ethyl cellulose,

- 4 -

propyl cellulose, polyethylene, or polypropylene, and a medicament. The films are three-layered laminates and include a bioadhesive layer, a reservoir layer, and a non water-soluble outer protective layer. The '729 Patent teaches a soft adhesive film applicable to the oral mucosa containing a systemic drug and comprising a mixture of a vinyl acetate non water-soluble homopolymer, an acrylic acid polymer, and a cellulose derivative. Finally, the '554 Patent describes a device for use in the oral cavity having an adhesive layer including a mixture of an acrylic acid polymer, a water-insoluble cellulose derivative, and a pharmaceutical preparation, and a water-insoluble or sparingly soluble backing layer. The adhesive layer contains the pharmaceutical, and upon application to the mucosal surface, delivers the drug. The '554 Patent also states that "it is impossible to achieve an adhesive device for application to body tissue without all three components, that is, acrylic acid polymer, water insoluble cellulose derivative and a water insoluble or sparingly soluble backing layer."

JP 56-100714 describes a preparation which comprises a coating layer and an active ingredient layer. The coating layer adheres to the mucosal membrane and is comprised of a cellulose ether or an acrylic acid polymer or salt. The active ingredient layer comprises an ointment base comprised of water-insoluble substances such as fats and oils, waxes, hydrocarbons, higher fatty acids, higher alcohols, polyhydric alcohols or glycerol esters. A surfactant and active ingredient are also present in the active ingredient layer. Thus, the active ingredient is mixed with an essentially non-water erodable substance. The previous examples of thin films to be applied in the oral cavity by adhesion onto the mucosal tissues all utilize polymers which are water-insoluble by nature or which are made water-insoluble by crosslinking, and claim a long residence time. Therefore, unfortunately, the above examples of thin films do not provide a water erodable device with good adhesive properties. Therefore, upon release of the desired amount of drug, the thin films of water insoluble polymers must be peeled off the site of application. Such peeling often removes tissue from the mucosal tissue and is painful to the patient. What is needed in the art is a water-erodable

- 5 -

pharmaceutical delivery device which provides good adhesion and localized delivery of a pharmaceutical with minimal discomfort to the patient.

SUMMARY OF THE INVENTION

5 The present invention relates to a novel water-erodable pharmaceutical carrier device for application to mucosal surfaces to provide protection of and localized delivery of pharmaceutical to the site of application, surrounding tissues, and other bodily fluids such as blood or lymph, having an effective residence time, with minimal discomfort and ease of use. In one embodiment, the pharmaceutical delivery device includes a layered film disk which is
10 water-erodable. The device comprises a layered film disk having an adhesive layer and a backing layer, both water-erodable, having the pharmaceutical in one or more of the layers.

 In another embodiment, the pharmaceutical delivery device further comprises a third layer between the first adhesive layer and the second backing layer. The third layer is a water-erodable adhesive layer which has a surface area sufficient to encompass said first
15 adhesive layer and contact the mucosal surface. In this manner, localized delivery of a pharmaceutical may be accomplished in a unidirectional manner toward the mucosal layer.

 The adhesive layer(s) comprise(s) a film-forming polymer such as hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxypropylmethyl cellulose, hydroxyethyl methyl cellulose, polyvinyl alcohol, polyethylene glycol, polyethylene oxide, ethylene oxide-
20 propylene oxide co-polymers, collagen and derivatives, gelatin, albumin, polyaminoacids and derivatives, polyphosphazenes, polysaccharides and derivatives, chitin, or chitosan, alone or in combination and a bioadhesive polymer such as polyacrylic acid, polyvinyl pyrrolidone, or sodium carboxymethyl cellulose, alone or in combination.

 The non-adhesive backing layer(s) comprise(s) hydroxyethyl cellulose, hydroxypropyl
25 cellulose, hydroxyethylmethyl cellulose, hydroxypropylmethyl cellulose, polyvinyl alcohol, polyethylene glycol, polyethylene oxide, or ethylene oxide-propylene oxide co-polymers, alone or in combination.

- 6 -

In another embodiment of the invention, one or more of the layers of the device further comprise a component which acts to adjust the kinetics of the erodability and provide a convenient manner of altering the release of the pharmaceutical and the lifespan of the device. A component which acts to adjust the kinetics of the erodability is a water-based emulsion of a polylactide, polyglycolide, lactide-glycolide copolymers, poly-ε-caprolactone and derivatives, polyorthoesters and derivatives, polyanhydrides and derivatives, ethyl cellulose, vinyl acetate, cellulose acetate, and polyisobutylene, alone or in combination. Another component which acts to adjust the kinetics of the erodability is alkyl-glycol, propylene glycol, polyethyleneglycol, oleate, sebacate, stearate or esters of glycerol, or phthalate, alone or in combination.

In another embodiment of the invention, the number of layers of the device further may be varied to adjust the kinetics of the erodability and provide a convenient manner of altering the release of the pharmaceutical and the lifespan of the device.

In a preferred embodiment, the backing layer comprises two or more layers with different erodibility kinetics.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a three layered film disk wherein layers 2 and 3 are bioadhesive layers and layer 1 is a backing layer.

Figure 2 is a three layered film disk wherein two of the layers are bioadhesive layers and the other layer is a backing layer. The bioadhesive layer, layer 3, which will adhere to the mucosal tissue is of smaller surface area and encompassed by the second bioadhesive layer, layer 2, to provide unidirectional delivery. Layer 1 is a backing layer.

DETAILED DESCRIPTION OF THE INVENTION

As used herein, the term "water-erodable" means that the component, device, layer, etc. erodes in water-based media such as saliva, over time. Such erosion in water may be due to factors such as dissolution, dispersion, friction, gravity, etc.

- 7 -

As used herein, the term "kinetics of erodability" or "erosion kinetics" refers to the timing of the release of pharmaceutical from the carrier device (release profile), as well as, the timing of the erosion of the device itself over time (lifespan or residence time of the device). As described herein, kinetics of erodability are based on factors such as type and
5 amount of components in the device, thickness and number of layers in the device, and additives or excipients in the device. In a case in which all the components of the device are very water soluble, the kinetics of erodability will closely parallel the solubility kinetics.

In the present invention, a novel water-erodable pharmaceutical device which adheres to mucosal surfaces is provided. The present invention finds particular use in the localized
10 treatment of body tissues, diseases, or wounds which may have moist surfaces and which are susceptible to bodily fluids, such as the mouth, the vagina, or other types of mucosal surfaces. The device carries a pharmaceutical, and upon application and adherence to the mucosal surface, offers a layer of protection and delivers the pharmaceutical to the treatment site, the surrounding tissues, and other bodily fluids. The device provides an appropriate residence
15 time for effective drug delivery at the treatment site, given the control of erosion in aqueous solution or bodily fluids such as saliva, and the slow, natural erosion of the film concomitant or subsequent to the delivery. In one embodiment, the pharmaceutical delivery device comprises a layered film disk having an adhesive layer and a backing layer, both water-erodable, having the pharmaceutical in either or both layers.

20 Unlike bioadhesive gels and pastes known in the art, which have a very limited residence time, given the tendency of bodily fluids such as saliva to wash away the gel from the treatment site, the present invention offers an increased residence time because of its filmy consistency and components. A typical residence time for an aqueous gel or paste, such as Orajel®, Orabase®, or Kanka® is a few minutes. This short residence time is a
25 consequence of a limited or poor adhesion. In a typical aqueous gel, the mucoadhesive components are either in solution, suspension, or swollen. Once applied to the mucosal surface, however, the water based gel does not instantaneously penetrate the lipophilic mucosal surface. The composition and water affinity of these gels results in a tendency to

- 8 -

quickly mix with the saliva, rapidly pulling away the different components of the gel, and limiting the residence time. The same tendency is expected with pastes, the increase in viscosity only slightly delaying the timing. The present invention, by its solid form and its instantaneous adhesion to the mucosal surface, allows a lasting contact, a consequence of the entanglement of polymer chains and glycoproteins of the mucosal tissue which assures adhesion. Erosion kinetics in the saliva and other aqueous media are influenced by the physical state of the device. While a gel or solution will readily mix with saliva and/or other bodily fluids, a solid form of the same or similar composition, such as the film of the present invention, dissolves / erodes more slowly.

Also, unlike the bioadhesive tablets which are known in the art, the pharmaceutical device of the present invention minimizes the discomfort associated with application of a foreign substance for a period of time sufficient to provide effective drug delivery to the treatment site. Often, users of the bioadhesive tablets of the prior art experience unpleasant sensations due to their solidity, bulkiness, and slow dissolution time if erodable, especially when used in the oral cavity. Moreover, the typical thickness of bioadhesive tablets, which may or may not be water soluble, is a couple of millimeters, and because of their thickness, the preferred site of application is on the upper gingival area. This site is usually unsatisfactory for local delivery as the type of compounds to be delivered, their bioavailability, and pharmacokinetics is limited. In contrast to tablets, the device of the present invention offers the advantages of an effective residence time with minimal discomfort and ease of use, and is an appropriate vehicle for the local, as well as systemic, delivery of pharmaceutical, given its thinner, flexible form.

Finally, unlike the film systems known in the art which are used to deliver pharmaceutical through the skin or mucous, the device of the present invention is made of water-erodable components and thus is bioerodable. The use of water-erodable components allows the device to erode over a period of time, with natural bodily fluids slowly dissolving or eroding away the carrier, while the pharmaceutical remains at the application site. Unlike bandages and other non-water-erodable film systems, the user of the present invention does

- 9 -

not have to remove the device following treatment. Nor does the user experience the sensation of the presence of a foreign object at the mucosal surface or within the body cavity, given that upon application, water absorption softens the device, and over time, the device slowly dissolves or erodes away.

5 The residence time of the device of the present invention depends on the erosion rate of the water-erodable polymers used in the formulation and their respective concentrations. The erosion rate may be adjusted, for example, by mixing together components with different solubility characteristics or chemically different polymers, such as hydroxyethyl cellulose and hydroxypropyl cellulose; by using different molecular weight grades of the same polymer,
10 such as mixing low and medium molecular weight hydroxyethyl cellulose; by using excipients or plasticizers of various lipophilic values or water solubility characteristics (including essentially insoluble components); by using crosslinking agents such as glyoxal with polymers such as hydroxyethyl cellulose for partial crosslinking; or by post-treatment irradiation or curing, which may alter the physical state of the film, including its crystallinity
15 or phase transition, once obtained. These strategies might be employed alone or in combination in order to modify the erosion kinetics of the device.

 Upon application, the pharmaceutical delivery device adheres to the mucosal surface and is held in place. Water absorption softens the device, thereby diminishing the foreign body sensation. As the device rests on the mucosal surface, delivery of the drug occurs.
20 Residence times may be adjusted over a wide range depending upon the desired timing of the delivery of the chosen pharmaceutical and the desired lifespan of the carrier. Generally, however, the residence time is modulated between about a few seconds to about a few days. Preferably, the residence time for most pharmaceuticals is adjusted from about 30 minutes to about 24 hours. More preferably, the residence time is adjusted from about 1 hour to about 8
25 hours. In addition to providing drug delivery, once the device adheres to the mucosal surface, it also provides protection to the treatment site, acting as an erodable bandage.

 In one embodiment, the present invention comprises a film disk having an adhesive layer and a non-adhesive backing layer which can be comprised of components having a

- 10 -

similar or different hydrophilicity. The pharmaceutical component may be included in either layer, although preferably, it is included in the adhesive layer, which is closest to the treatment site and which will have a slower erosion time, given that the backing layer protects the interior, adhesive layer and will typically erode first.

5 The adhesive layer may comprise at least one film-forming water-erodable polymer (the "film-forming polymer") and at least one pharmacologically acceptable polymer known for its bioadhesive capabilities (the "bioadhesive polymer"). The film forming polymer may comprise hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxypropylmethyl cellulose, hydroxyethyl methyl cellulose, polyvinyl alcohol, polyethylene glycol, polyethylene oxide, 10 ethylene oxide-propylene oxide co-polymers, collagen and derivatives, gelatin, albumin, polyaminoacids and derivatives, polyphosphazenes, polysaccharides and derivatives, chitin and chitosan, alone or in combination. Preferably, the film-forming polymer comprises hydroxyethyl cellulose. Preferably, in the case of hydroxyethyl cellulose, the average molecular weight (M_w estimated from intrinsic viscosity measurements) is in the range 10^2 15 to 10^6 and more preferably in the range 10^3 to 10^5 , while in the case of hydroxypropyl cellulose, the average molecular weight (M_w obtained from size exclusion chromatography measurements) is in the range 50×10^3 to 1.5×10^6 , and more preferably between 80×10^3 to 5×10^5 .

20 The bioadhesive polymer of the adhesive layer may comprise polyacrylic acid (PAA), which may or may not be partially crosslinked, sodium carboxymethyl cellulose (NaCMC), and polyvinylpyrrolidone (PVP), or combinations thereof. These bioadhesive polymers are preferred because they have good and instantaneous mucoadhesive properties in a dry, film state. In the case of sodium carboxymethyl cellulose, typical average molecular weights comprise 50,000 to 700,000, and preferably 60,000 to 500,000, with a degree of substitution 25 of 0.7. The substitution range varies between 0.5 and 1.5, and preferably between 0.6 and 0.9. The polyvinyl pyrrolidone can be characterized according to its average molecular weight and comprises between 5,000 and 150,000, preferably between 10,000 and 100,000.

- 11 -

The simultaneous use of PAA with some grades of PVP may result in the precipitation of one or both components. This precipitation may not be ideal to obtain a homogenous layer and may slightly alter the overall adhesive properties of the device.

While not wishing to bound to a particular theory, it is believed that the adhesion properties of the present invention are the result of the entanglement of polymer chains and interactions with glycoproteins of the mucosal surface. The chemical nature of the bioadhesive polymers, including chain and side groups and crosslinking agents, generates interactions between the mucosal constituents and the polymer or polymers, such as physical entanglement, Van der Waals interactions, and hydrogen bonding. Given that the composition of mucosal tissues differs from one individual to another and changes naturally over time, the use of a combination of bioadhesive polymers or the use of a combination of different grades of the same polymer is preferred. The use of a combination of at least two bioadhesive polymers maximizes the adhesion capabilities of the device, although use of a single bioadhesive polymer is effective as well.

The ratio of the bioadhesive polymer to the film-forming polymer in the adhesive layer may vary, depending on the type of pharmaceutical and the amount of pharmaceutical to be used. However, the content of combined components in the adhesive layer is usually between 5 and 95% by weight, preferably between 10 and 80% by weight. In terms of weight percent of the different bioadhesive polymers PAA, NaCMC, and PVP, some examples are provided below and using the examples one skilled in the art will be able to readily adjust the percentages to obtain a pharmaceutical device having desired characteristics for a given application. Preferred combinations include PAA and NaCMC, NaCMC and PVP, or PAA and PVP, and also include the use of different grades of the same polymer.

The non adhesive backing layer may comprise a water-erodable, film-forming pharmaceutically acceptable polymer such as hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxypropylmethyl cellulose, hydroxyethylmethyl cellulose, polyvinylalcohol, polyethylene glycol, polyethylene oxide, ethylene oxide-propylene oxide co-polymers, collagen and derivatives, gelatin, albumin, polyaminoacids and derivatives,

- 12 -

polyphosphazenes, polysaccharides and derivatives, chitin and chitosan, alone or in combination. The backing layer component may or may not be crosslinked depending on the desired erosion kinetics. In one embodiment, the preferred backing layer component comprises hydroxyethyl cellulose or hydroxypropyl cellulose, and more preferably comprises hydroxyethyl cellulose. Preferably, in the case of hydroxyethyl cellulose, the average molecular weight (M_w estimated from intrinsic viscosity measurements) is in the range 10^2 to 10^6 , and more preferably in the range 10^3 to 10^5 , while in the case of hydroxypropyl cellulose, the average molecular weight (M_w obtained from size exclusion chromatography measurements) is in the range of 50×10^3 to 1.5×10^6 and more preferably from 80×10^3 to 5×10^5 .

As described above, the erosion kinetics of one or more of the layers (adhesive layer, backing layer, or both) may be altered in many different ways in order to modify the residence time and the release profile of a drug. One way is by crosslinking or plasticizing the film-forming polymer. Crosslinking agents known in the art are appropriate for use in the invention and may include glyoxal, propylene glycol, glycerol, dihydroxy-polyethylene glycol of different sizes, butylene glycol, and combinations thereof. The amount of crosslinking agent used may vary, depending on the particular polymers and crosslinking agent but usually should not exceed 5% molar equivalent of the polymeric material, and preferably comprises 0 to 3% molar equivalent of the polymeric material.

Another way of altering the residence time and release profile is by employing a component in one or more of the layers which acts to adjust the kinetics of the erodability of the layer. While these components will vary widely depending upon the particular pharmaceutical delivery device employed, preferred components include water-based emulsions of polylactide, polyglycolide, lactide-glycolide copolymers, poly- ϵ -caprolactone and derivatives, polyorthoesters and derivatives, polyanhydrides and derivatives, ethyl cellulose, vinyl acetate, cellulose acetate, silicone, polyisobutylene and derivatives, alone or in combination.

- 13 -

Emulsifiers typically used in the water-based emulsions described above are, preferably, either obtained *in situ* if selected from the linoleic, palmitic, myristoleic, lauric, stearic, cetoleic or oleic acids and sodium or potassium hydroxide, or selected from the laurate, palmitate, stearate, or oleate esters of sorbitol and sorbitol anhydrides, 5 polyoxyethylene derivatives including monooleate, monostearate, monopalmitate, monolaurate, fatty alcohols, alkyl phenols, alyl ethers, alkyl aryl ethers, sorbitan monostearate, sorbitan monooleate and sorbitan monopalmitate.

Furthermore, in the case of the water-insoluble polymeric materials such as the polyester-aliphatic family (co-polymers of lactide-glycolide, caprolactone, etc.) the average 10 molecular weight (M_w) is in the range 10^2 to 10^5 and, more preferably, 10^3 to 10^4 , while in the case of the cellulosic family (ethyl cellulose, cellulose acetate, etc.), the average molecular weight (M_w estimated from intrinsic viscosity measurements) is in the range 10^2 to 10^6 and more preferably in the range 10^3 to 10^5 .

Yet another manner of modifying the erosion kinetics of any layer, is by employing 15 excipients which plasticize the film concomitantly. Suitable excipients or plasticizers modifying the erosion behavior of the layer(s) may include alkyl-glycol such as propylene glycol, polyethyleneglycols, oleate, sebacate, stearate or esters of glycerol, phthalate and others.

It is also possible to modify the erosion kinetics of the device of the instant invention 20 by adjusting the thickness and number of layers. Typically, the thicker the layers, the slower the release of pharmaceutical and the longer the release profile. Correspondingly, the more layers there are, the slower the release of pharmaceutical and the longer the release profile. In a preferred embodiment, the backing layer comprises two or more layers with different erosion kinetics.

25 Moreover, combinations of different polymers or similar polymers with definite molecular weight characteristics may be used in order to achieve preferred film forming capabilities, mechanical properties, and kinetics of dissolution in any layer. Some

- 14 -

combinations for use in the invention are provided in the examples below and may include $\frac{3}{4}$ of hydroxyethyl cellulose and $\frac{1}{4}$ of hydroxypropyl cellulose; $\frac{4}{5}$ of low molecular weight hydroxyethyl cellulose and $\frac{1}{5}$ of medium molecular weight hydroxyethyl cellulose; and $\frac{8}{9}$ of low molecular weight hydroxyethyl cellulose and $\frac{1}{9}$ of high molecular weight hydroxyethyl cellulose. As mentioned previously, combinations of water-erodable polymers may be employed in order to modify the erosion kinetics of the device. A particularly preferred combination includes $\frac{1}{2}$ hydroxyethyl cellulose, $\frac{1}{6}$ hydroxypropylcellulose, and $\frac{2}{6}$ of a pseudolatex, i.e. emulsion of polymer, of lactide-glycolide copolymer.

The pharmaceutical component of the present invention may comprise a single pharmaceutical or a combination of pharmaceuticals, which may be incorporated in the adhesive layer, the backing layer, or both. Pharmaceuticals which may be used, either alone or in combination, include anti-inflammatory analgesic agents, steroidal anti-inflammatory agents, antihistamines, local anesthetics, bactericides and disinfectants, vasoconstrictors, hemostatics, chemotherapeutic drugs, antibiotics, keratolytics, cauterizing agents, antiviral drugs, antirheumatics, antihypertensives, bronchodilators, anticholinergics, antimenimic compounds, hormones and macromolecules, peptides, proteins and vaccines.

Examples of anti-inflammatory analgesic agents include acetaminophen, methyl salicylate, monoglycol salicylate, aspirin, mefenamic acid, flufenamic acid, indomethacin, diclofenac, alclofenac, diclofenac sodium, ibuprofen, ketoprofen, naproxen, pranoprofen, fenoprofen, sulindac, fenclofenac, clidanac, flurbiprofen, fentiazac, bufexamac, piroxicam, phenylbutazone, oxyphenbutazone, clofezone, pentazocine, mepirizole, tiaramide hydrochloride, etc. Examples of steroidal anti-inflammatory agents include hydrocortisone, predonisolone, dexamethasone, triamcinolone acetonide, fluocinolone acetonide, hydrocortisone acetate, predonisolone acetate, methylpredonisolone, dexamethasone acetate, betamethasone, betamethasone valerate, flumetasone, fluorometholone, beclomethasone dipropionate, fluocinonide, etc.

Examples of antihistamines include diphenhydramine hydrochloride, diphenhydramine salicylate, diphenhydramine, chlorpheniramine hydrochloride,

- 15 -

chlorpheniramine maleate isothipendyl hydrochloride, tripeleminamine hydrochloride, promethazine hydrochloride, methdilazine hydrochloride, etc. Examples of local anesthetics include dibucaine hydrochloride, dibucaine, lidocaine hydrochloride, lidocaine, benzocaine, p-buthylaminobenzoic acid 2-(diethylamino) ethyl ester hydrochloride, procaine
5 hydrochloride, tetracaine, tetracaine hydrochloride, chloroprocaine hydrochloride, oxyprocaine hydrochloride, mepivacaine, cocaine hydrochloride, piperocaine hydrochloride, dyclonine, dyclonine hydrochloride, etc.

Examples of bactericides and disinfectants include thimerosal, phenol, thymol, benzalkonium chloride, benzethonium chloride, chlorhexidine, povidone iodine,
10 cetylpyridinium chloride, eugenol, trimethylammonium bromide, etc. Examples of vasoconstrictors include naphazoline nitrate, tetrahydrozoline hydrochloride, oxymetazoline hydrochloride, phenylephrine hydrochloride, tramazoline hydrochloride, etc. Examples of hemostatics include thrombin, phytonadione, protamine sulfate, aminocaproic acid, tranexamic acid, carbazochrome, carbaxochrome sodium sulfanate, rutin, hesperidin, etc.

15 Examples of chemotherapeutic drugs include sulfamine, sulfathiazole, sulfadiazine, homosulfamine, sulfisoxazole, sulfisomidine, sulfamethizole, nitrofurazone, etc. Examples of antibiotics include penicillin, meticillin, oxacillin, cefalotin, cefalordin, erythromycin, lincomycin, tetracycline, chlortetracycline, oxytetracycline, metacycline, chloramphenicol, kanamycin, streptomycin, gentamicin, bacitracin, cycloserine, etc.

20 Examples of keratolytics include salicylic acid, podophyllum resin, podolifox, and cantharidin. Examples of cauterizing agents include the chloroacetic acids and silver nitrate. Examples of antiviral drugs include protease inhibitors, thymidine kinase inhibitors, sugar or glycoprotein synthesis inhibitors, structural protein synthesis inhibitors, attachment and adsorption inhibitors, and nucleoside analogues such as acyclovir, penciclovir, valacyclovir,
25 and ganciclovir.

Examples of proteins, peptides, vaccines, genes and the like include heparin, insulin, LHRH, TRH, interferons, oligonucleotides, calcitonin, and octreotide.

- 16 -

The amount of active pharmaceutical (s) to be used depends on the desired treatment strength and the composition of the layers, although preferably, the pharmaceutical component comprises from about 0.001 to about 99, more preferably from about 0.003 to about 30, and most preferably from about 0.005 to about 20% by weight of the device.

5 Plasticizers, flavoring and coloring agents, and preservatives may also be included in the pharmaceutical delivery device of the present invention in the adhesive layer, the backing layer, or both. The amount may vary depending on the drug or other components but typically these components comprise no more than 50, preferably no more than 30, most preferably no more than 15% by total weight of the device.

10 A permeation enhancer may be added to the device to improve absorption of the drug. Typically, such a permeation enhancer is added to the layer in which the pharmaceutical is to be contained. Suitable permeation enhancers include natural or synthetic bile salts such as sodium fusidate; glycocholate or deoxycholate; fatty acids and derivatives such as sodium laurate, oleic acid, oleyl alcohol, monoolein, and palmitoylecarnitine; chelators such as
15 disodium EDTA, sodium citrate and sodium laurylsulfate, azone, sodium cholate, sodium 5-methoxysalicylate, sorbitan laurate, glyceryl monolaurate, octoxynonyl-9, laureth-9, polysorbates, etc.

The thickness of the device may vary, depending on the thickness of each of the layers and the number of layers. As stated above, both the thickness and amount of layers may be
20 adjusted in order to vary the erosion kinetics. Preferably, if the device has only two layers, the thickness ranges from 0.05 mm to 1 mm, and more preferably from 0.1 to 0.5 mm. The thickness of each layer may vary from 10 to 90% of the overall thickness of the layered device, and preferably varies from 30 to 60%. Thus, the preferred thickness of each layer may vary from 0.01 mm to 0.9 mm, and more preferably from 0.03 to 0.6 mm.

25 While the device of the invention only requires two layers, i.e., an adhesive layer and a backing layer, it is often preferable to have additional layers. One instance in which this might be advantageous is when specific unidirectional flow of a pharmaceutical is required toward a mucosal layer. The layered device described above provides some directional

- 17 -

release, i.e., release will mainly be toward the mucosa and not, for instance, into the oral or vaginal cavity. However, due to the swelling characteristics of the thin film, a small amount of pharmaceutical may also be released through the sides of the device and the backing layer if all the layers are of the approximately the same surface area and are essentially on top of one another. While a preferential, but not specific, release is acceptable, and even desirable, for many pharmaceuticals, other pharmaceuticals may require unidirectional, specific release into the mucosal tissue.

An example of when unidirectional release may be desirable is when the pharmaceutical to be delivered has a specific therapeutic window or has undesirable side effects if absorbed in the gastrointestinal tract. Furthermore, some pharmaceuticals are enzymatically degraded. Therefore, a bioerodible mucoadhesive system allowing a transmucosal unidirectional delivery and protecting the drug being delivered from enzymes present, for instance, in the oral or vaginal cavities would have advantages.

In such instances when unidirectional release is desired, an additional layer may be placed between the first adhesive layer and the second backing layer. The third layer is a water-erodable adhesive layer which has a surface area sufficient to encompass said first adhesive layer and contact the mucosal surface. The third layer may be comprised of any of the components described above for the first adhesive layer and thus may be the same or different than the first adhesive layer. Figure 2 illustrates a disk having a third layer which encompasses the first adhesive layer.

If a bioadhesive layer is to be of a smaller surface area than the other layers then it is usually between about 5 and about 50, preferably between about 10 and about 30% smaller than the other layers.

In the aforementioned manner, localized delivery of a pharmaceutical may be accomplished in a unidirectional manner. For instance, if pharmaceutical is present in the first adhesive layer then it is prevented from being released through the sides and back of the device. If pharmaceutical is present in the backing layer, then it is prevented from entering

- 18 -

the mucosal layer to which the device is adhered. Likewise, if a pharmaceutical is present in the first adhesive layer and the backing layer, they are prevented from mixing.

The pharmaceutical delivery device of the present invention may be prepared by numerous methods known in the art. In one embodiment, the components are dissolved in an aqueous medium or a combination of water and lower alkanols to prepare a solution, a gel, or a suspension that can be used for coating. Solvents for use in the present invention may comprise water, methanol, ethanol, or low alkyl alcohols such as isopropyl alcohol, or acetone. The final solvent content or residual solvent content in the film may be the result of either or both layers. The solvent may also be used as a plasticizer or an erosion rate-modifying agent.

Each solution is then coated onto a substrate. Eventually, one of the components might be in suspension. Each solution is casted and processed into a thin film by techniques known in the art, such as by film dipping, film coating, film casting, spin coating, or spray drying using the appropriate substrate. The thin film is then allowed to dry. If desired, the drying step can be accomplished in any type of oven in order to facilitate the process. However, as one skilled in the art will appreciate, the solvent residual, which may effect the erosion kinetics, depends on the drying procedure. The film layers may be filmed independently and then laminated together or may be filmed one on the top of the other.

The film obtained after the two layers have been laminated together or coated on top of each other may be cut, if desired, into any type of shape which is suitable for application to the mucosal tissue. Suitable shapes may include disks, ellipses, squares, rectangles, parallelepipeds, as well as, shredded, meshed, or porous films depending upon the purpose and location where the device is to be employed. Likewise, the surface area of the device of the present invention will necessarily vary depending on many factors with the major factor being where the device is to be employed. Typically, the surface area may be from about 0.1 to about 30, preferably from 0.5 to about 20 square centimeters.

Methods for treating mucosal surfaces, surrounding tissues, and bodily fluids for localized and systemic drug delivery are also provided. In one embodiment, the method

- 19 -

comprises applying an adherent film of the invention to the treatment site in order to provide protection to the treatment site and drug delivery. The adherent film may comprise any of the layered devices provided herein. In a preferred embodiment, the method comprises application of a layered pharmaceutical carrier device having a first adhesive layer and a
5 second non-adhesive backing layer as described above, each layer having a thickness of from 0.01 mm to 0.9 mm. The pharmaceutical or combination of pharmaceuticals may be present in the adhesive layer, the non-adhesive backing layer, or both layers.

While the pharmaceutical carrier described in this application readily adheres to mucosal tissues, which are wet tissues by nature, it can also be used on other surfaces such as
10 skin or wounds. The water-soluble film of the present invention will adhere to the skin if prior to application the skin is wet with an aqueous-based fluid such as water, saliva, or perspiration. The film will typically adhere to the skin until it erodes due contact with water by, for example, showering, bathing or washing. The film may also be readily removed by peeling without significant damage to tissue.

15 While it is in contact with the skin, the film may act as a washable, erodable bandage to protect the area where it has been applied. It is also possible to employ the film as a transdermal drug delivery system to facilitate the healing process and keep the wound or burn free of germs and debris. A significant advantage of the instant invention over conventional alternatives is that not only is the film washable, but also, perspiration helps the adhesion of
20 the device instead of preventing or reducing it as with conventional transdermal patches.

The pharmaceutical carrier of the present invention can also be used as a wound dressing. By offering a physical, compatible, oxygen and moisture permeable, flexible barrier which can be washed away, the film can not only protect a wound but also deliver a pharmaceutical in order to promote healing, asepsy, scarification, to ease the pain or to
25 improve globally the condition of the sufferer. Some of the examples given below are well suited for an application to the skin or a wound. As one skilled in the art will appreciate, the formulation might require incorporating a specific hydrophilic / hygroscopic excipient which would help in maintaining good adhesion on dry skin over an extended period of time.

- 20 -

Another advantage of the present invention when utilized in this manner is that if one does not wish that the film be noticeable on the skin, then no dyes or colored substances need be used. If, on the other hand, one desires that the film be noticeable, a dye or colored substance may be employed.

5

EXAMPLE 1

A 100 ml solution for the non-adhesive backing layer was made using 87.98% by weight water USP, 0.02% by weight FD&C red 40 dye, and 12% by weight hydroxyethyl cellulose ($M_w 9 \times 10^4$). Using a Werner Mathis Labcoater, the substrate (Mylar 1000D or other polyester films such as 3M ScotchPak 1022) was set. 90 ml of the backing layer solution was set in front of a knife over roll with an opening of 1.5 mm. The solution was then casted on a glass substrate and film dried for 8-9 min. at 130° C. Following the drying step, a 0.14 mm thick reddish film was the result.

Using this procedure, the film may be easily peeled off the substrate after drying, or may be left on the substrate and rolled, to be laminated later, or for use as a substrate for the adhesive layer.

EXAMPLE 2

A 100 ml solution for the non-adhesive backing layer was made using 94.98% by weight water USP, 0.02% by weight FD&C red 40 dye, and 5% by weight hydroxypropyl cellulose. The procedure of example 1 was used, resulting in a 0.16 mm thick film.

EXAMPLE 3

A 100 ml solution for the non-adhesive backing layer was made using 84.98% by weight water USP, 0.02% by weight FD&C red 40 dye, 12% by weight hydroxyethyl cellulose, and 3% by weight hydroxypropyl cellulose. Here, the overall polymeric material was at a 15% concentration in solution. The mixture of two different types of polymeric materials modified the overall mechanical properties and erosion kinetics characteristics of

25

- 21 -

the backing film. The solution was then casted on a polyester substrate and dried overnight at 90°C. The opening of the knife was set at 3 mm, resulting in a 0.3 mm thick film.

EXAMPLE 4

5 A 100 ml solution for the non-adhesive backing layer was made using 87.98% by weight water USP, 0.02% by weight FD&C red 40 dye, 10% by weight hydroxyethyl cellulose ($M_w 9 \times 10^4$), and 2% by weight hydroxyethyl cellulose ($M_w 7 \times 10^5$). Here, the mixture of two different types of hydroxyethyl cellulose modified the mechanical properties and erosion kinetics of the backing film. The solution was then cast on a polyester substrate
10 and dried for 12 min. at 135° C. The opening of the knife was set at 3 mm, resulting in a 0.27 mm thick film.

EXAMPLE 5

A 100 ml solution for the non-adhesive backing layer was made using 87.98% by
15 weight water USP, 0.02% by weight FD&C red 40 dye, 11.75% by weight hydroxyethyl cellulose ($M_w 9 \times 10^4$), and 0.25% by weight hydroxyethyl cellulose ($M_w 1.3 \times 10^6$). The procedure of Example 1 was used, resulting in a 0.14 mm thick film.

Here, the mixture of two different grades of hydroxyethyl cellulose modified the mechanical properties and erosion kinetics of the backing film. The ratio may be used to
20 adjust the erosion pattern and residence time of the bioadhesive disk. Compared to the backing layer of Example 1, which was made of 12% by weight hydroxyethyl cellulose ($M_w 9 \times 10^4$), and which had an erosion time of about 21 minutes (See Table 2), the backing layer of this Example, made from a combination of two grades of hydroxyethyl cellulose, had an erosion time of about 69 minutes (See Table 2).

25

EXAMPLE 6

A 100 ml solution for the non-adhesive backing layer was made using 87.98% by weight water USP, 0.02% by weight FD&C red 40 dye, 11.95% by weight hydroxyethyl

- 22 -

cellulose (Mw 9×10^4), and 0.05% by weight of 40% glyoxal aqueous solution. The procedure of Example 1 was used, resulting in a 0.13 mm film.

Here, the glyoxal acted as a crosslinking agent, inducing a slow down in the erosion kinetics of the backing film. Compared to the backing layer of Example 1, which had no glyoxal and which had an erosion time of about 21 minutes (See Table 2), the backing layer of this Example, which incorporated glyoxal, had an erosion time of about 57 minutes (See Table 2).

EXAMPLE 7

A 100 ml solution for the non-adhesive backing layer was made using 87.98% by weight water USP, 0.02% by weight FD&C red 40 dye, 11.8% by weight hydroxyethyl cellulose, 0.1% by weight of 40% glyoxal aqueous solution, and 0.1% sweet peppermint flavor. Here, as in Example 6, the glyoxal acted as a crosslinking agent, inducing a slow down in the erosion kinetics of the backing film, compared with a backing layer with no glyoxal. The sweet peppermint was added as a flavoring agent.

EXAMPLE 8

As described in Example 1, the solutions of Examples 5, 6 and 7 were each casted on a polyester substrate. Instead of using a knife, a meier's bar was used to coat the substrate. The films were dried overnight at 90° C. The dried films were thicker, having a thickness of about 0.17 mm.

EXAMPLE 9

The solution of Example 1 was prepared in a beaker. A microslide was then dipped quickly into the solution until it was fully immersed, removed from the solution, and left at room temperature for about 1 hour. The microslide was then dried overnight at 90° C. The resulting film was heterogeneous and had an average thickness of about 0.2 mm.

- 23 -

EXAMPLE 10

A 100 ml solution for the non-adhesive backing layer was made using 84% by weight water USP, 0.02% by weight FD&C red 40 dye, 11% by weight hydroxyethyl cellulose (Mw 9×10^4), 1% by weight hydroxyethyl cellulose (Mw 7×10^5), 0.1% by weight of a 40% glyoxal aqueous solution, 3% by weight glyoxal, and 1% by weight menthol. Here, the glyoxal acted as a crosslinking agent, inducing a slow down in the erosion kinetics of the backing film. Also, the mixture of two different grades of hydroxyethyl cellulose was used to achieve slow release of the menthol. The film was coated on a polyester film as previously described.

EXAMPLE 11

A 100 ml solution for the adhesive layer was made using 88.6% by weight water USP, 1.8% by weight hydroxyethyl cellulose, Natrosol® 99-250 L NF (Aqualon), 2.6% by weight polyacrylic acid, Noveon® AA1 USP (BF Goodrich), 4.5% sodium carboxymethyl cellulose, cellulose gum 7 LF PH (Aqualon), and 2.5% by weight dyclonine HCl. Upon mixing, a suspension was formed.

Here, dyclonine HCl may be easily substituted with any other active pharmaceutical component. However, chemical characteristics of the active pharmaceutical, such as solubility, counter ions, and melting point, might require minor modifications of the overall process, such as dissolution in a particular solvent, changing the temperature of the solution, etc. The next example illustrates one slight modification.

EXAMPLE 12

A 100 ml solution for the adhesive layer was made using 74.6% by weight water USP, 1.8% by weight hydroxyethyl cellulose, 2.6% by weight polyacrylic acid, 4.5% sodium carboxymethyl cellulose, 2.5% by weight benzocaine, and 14% by weight ethyl alcohol. The use of benzocaine as the active pharmaceutical required that it first be dissolved in ethyl alcohol, given that benzocaine is more soluble in alcohol than water.

- 24 -

In the final solution, the benzocaine tends to precipitate in the form of a very fine powder. However, the film characteristics and bioadhesive properties remain intact.

EXAMPLE 13

A 100 ml solution for the adhesive layer was made using 91% by weight water USP, 2% by weight hydroxyethyl cellulose, 2.5% by weight polyacrylic acid, and 4.5% sodium carboxymethyl cellulose. The composition of the adhesive layer may be modified and may vary according the ranges described in Table 1 below:

TABLE 1

Item #	%w	Material
1	60 to 99.5	Water USP
2	0.05 to 5	Hydroxyethyl cellulose
3	0.5 to 10	Polyacrylic acid
4	0.0 to 15	Sodium Carboxymethyl cellulose
5	0 to 10	Polyvinyl pyrrolidone

The relative part of each components depends of the chemical compatibility of the components and the residence time to be obtained.

EXAMPLE 14

A 100 ml solution for the adhesive layer was made using 90% by weight water USP, 1% by weight butacaine sulfate, 2% by weight hydroxyethyl cellulose, 2.5% by weight polyvinyl pyrrolidone, and 4.5% by weight sodium carboxymethyl cellulose. The solution was coated using a knife over roll on a Mylar substrate.

EXAMPLE 15

A 100 ml solution for the adhesive layer was made. The total composition of the solution was 48.6% water, 40% ethyl alcohol, 1.8% hydroxyethyl cellulose, 2.6% polyacrylic

- 25 -

acid, 4.5% sodium carboxymethyl cellulose, and 2.5% dyclonine HCl. Here, however, the dyclonine HCl was first solubilized in 40 ml ethyl alcohol, and then, 48.6 ml of water were added to the dyclonine HCl/ethyl alcohol solution, followed by the addition of the other components.

5 The use of ethyl alcohol as an additional solvent resulted in a suspension which was slightly more viscous than that of Example 11, which used water as the only solvent.

EXAMPLE 16

Following the procedure of Example 12, a 100 ml solution for the adhesive layer was
10 prepared. The solution was then coated following the procedure used in Example 1. The resulting film was 0.12 mm thick.

EXAMPLE 17

Following the procedure of Example 12, a 100 ml solution for the adhesive layer was
15 prepared. The solution was coated on top of a backing film prepared according to Example 1. The opening of the knife was adjusted, taking into account the thickness of the backing film. After coating, the layered film was dried at 130°C for 15 minutes. A 0.27 mm layered film of two layers was formed.

EXAMPLE 18

20 Following the procedure of Example 14, a bioadhesive film was prepared, except that the film was not fully dried. A backing film was prepared according to Example 1. The backing film was peeled off of its substrate and laminated on top of the bioadhesive film while still moist, and pressure was applied to seal the two films together. The pressure
25 applied on the films resulted in a good interfacial adhesion. A 0.38 mm layered film of two layers was formed.

- 26 -

EXAMPLE 19

Following the procedure of Example 1, several solutions for backing films were prepared according to the compositions of Table 2 below. Following film formation, ½ inch disks were die cut and set on a double-sided tape. The tape was then positioned on a micro slide. The kinetics of erosion were evaluated in water: the slide was plunged into a 100 ml beaker of water stirred at a constant speed of 50 rpm. The time for erosion was measured from the moment the disk was fully immersed in the beaker of water. Percentages (%) refer to the concentration in solution.

TABLE 2

Composition	Weight (mg)/ Thickness (mm)	Erosion Time (min.)
12% HEC (Mw 9×10^4)	17.1 / 0.14	21
10% HEC (Mw 9×10^4) and 2% HEC (Mw 7×10^5)	16.9 / 0.13	37
9% HEC (Mw 9×10^4) and 3% HEC (Mw 7×10^5)	17 / 0.14	75
11.75% HEC ((Mw 9×10^4) and 0.25% HEC (Mw 1.3×10^6)	17.1 / 0.14	69
11.95% HEC ((Mw 9×10^4) and 0.05% glyoxal (40% aq. sol.)	17.2 / 0.13	57
11.99% HEC ((Mw 9×10^4) and 0.01% propylene glycol	17.3 / 0.14	65

The results demonstrate that the erosion time varies, depending on the components of the formulation, assuming a similar surface state for each sample. Although water does not mimic the exact composition of saliva, and this experiment cannot precisely replicate *in vivo*

- 27 -

residence times, the experiment provides an *in vitro* comparison of erosion times of various compositions for use in practicing the present invention.

EXAMPLE 20

5 1/2 inch diameter disks having a thickness of between 0.19 and 0.21 mm were administered to six healthy volunteers. The backing layer was prepared according to Example 1, and the adhesive layer was prepared according to Example 15, some containing dyclonine HCl as the active pharmaceutical component, and others containing benzocaine as a substitute. The adhesive layer was coated on top of the backing layer, forming a layered
10 disk. The layered disk was set in the mouth, and the time for erosion was measured from the moment the disk was set in place.

Participants were asked to evaluate the disk's handling and numbing effect on a scale of 0 to 3, with 3 being very good, 2 good, 1 fair, and 0 poor. Participants also evaluated the time necessary for adhesion; the residence time; the foreign body sensation, if any, and its
15 duration; and the erosion of the disk. Finally, participants were asked to evaluate the overall effectiveness of the disk and their overall impression, as well as which pharmaceutical component, dyclonine HCl (D) or benzocaine (B), they preferred. The results are described in Table 3 below.

- 28 -

TABLE 3

No.	Handling	Adhesion	Residence Time	Foreign Body Sensation	Numbing	Dissolution	Efficiency	Over-all	Pharmaceutical Pref.
1	3	instant	~ 1 hr	< 5 min.	3	did not notice	+	+	B
2	2	instant	~ 1 hr	< 5 min.	3	did not notice	+	+	B
3	3	instant	~ 45 min.	no	2	did not notice	+	+	D
4	3	instant	~ 45 min.	no	2	at the end	+	-	D
5	2	instant	~ 30 min.	< 5 min.	3	at the end	+	+	D
6	1	difficult	~ 15 min.	< 5 min.	2	did not notice	-	-	D

The results demonstrate that although the handling of the disk may be difficult for first time users, the adhesion is instantaneous, there is only a minor foreign body sensation which disappears after a couple minutes upon swelling of the disk, and numbing is effective.

EXAMPLE 21

A 1 kg preparation of a backing layer was made using 43.49% by weight of water, 43.49% by weight of ethyl alcohol, 0.02% of FD&C red dye 40, 12% by weight of hydroxyethyl cellulose (Mw 9 x 10⁴) and 1% by weight of 40% glyoxal aqueous solution. Then another 1 kg batch of the backing solution described at the example 1 was prepared. Using a Werner Mathis Labcoater, the substrate (Mylar 1000D or other polyester films such

- 29 -

as 3M ScotchPak 1022) was set. 90 ml of the backing layer solution prepared according to example 1 was set in front of a knife over roll with an opening of 0.7 mm. The solution was then casted on the substrate and film dried for 8-9 min. at 130° C. Following the drying step, a 0.09 mm thick reddish film was the result. Then, the backing solution first described in this
5 example was casted directly on the top of the first layer with the knife over roll technique using an opening of 0.8 mm. The resulting bilayer backing film was 0.15 mm thick.

EXAMPLE 22

A preparation of a backing layer obtained as described in example 5 was cast using a
10 knife over roll and dried for 8-9 min. at 130° C. Then a preparation of a backing layer using 43.49% by weight of water, 43.49.% by weight of ethyl alcohol, 0.02% of FD&C red dye 40, 12% by weight of hydroxyethyl cellulose (Mw 9 x 104) and 1% by weight of 40% glyoxal aqueous solution was coated directly on the top of the previous dry film (first layer was 0.05 mm thick) The resulting bilayer backing film was 0.12 mm thick.

15

EXAMPLE 23

When a crosslinking agent is incorporated in the formulation, thermal curing allows to further crosslink the material either before or after the bioadhesive(s) layer(s) have been casted. Thermal curing of the films is performed by exposing the films to a time-temperature
20 cycle. For instance, the film obtained at the end of example 22 might be exposed to 150°C for 5 minutes, 120°C for 10 minutes or any temperature/time which would accommodate the stability requirements of the film's components.

EXAMPLE 24

A preparation of a backing layer obtained as described in example 5 was cast using a
25 knife over roll and dried for 8-9 min. at 130° C. A preparation of a backing layer using 42.49% by weight of water, 42.49.% by weight of ethyl alcohol, 0.02% of FD&C red dye 40, 11% by weight of hydroxyethyl cellulose (Mw 9 x 104), 2% by weight of polyethylene glycol

- 30 -

6000 and 2% by weight of propylene glycol was coated directly on the top of the previous dry film (first layer was 0.06 mm thick) The resulting bilayer backing film was 0.12 mm thick.

EXAMPLE 25

5 A preparation of a backing layer using 42.49% by weight of water, 42.49.% by weight of ethyl alcohol, 0.02% of FD&C red dye 40, 10% by weight of hydroxyethyl cellulose (Mw 9 x 104), 4% by weight of hydropropylcellulose (Mw 5 105) was coated using a knife over roll technique. Then directly on the top of the previous dry film (first layer was 0.07 mm thick) a backing preparation made from 42.49% by weight of water, 42.49.% by weight of
10 ethyl alcohol, 0.02% of FD&C red dye 40, 12% by weight of hydroxyethyl cellulose (Mw 9 x 104) and 3% by weight of oleic acid, was casted and dried. The resulting bilayer backing film was 0.15 mm thick.

EXAMPLE 26

15 A preparation for the adhesive layer was made using 45.6% by weight water USP, 45% by weight of ethyl alcohol, 2% by weight hydroxyethyl cellulose, Natrosol® 99-250 L NF (Aqualon), 2.9% by weight polyacrylic acid, Noveon® AA1 USP (BF Goodrich), and 4.5% by weight of sodium carboxymethyl cellulose, cellulose gum 7 LF PH (Aqualon). This preparation is a bioadhesive preparation but does not contain any pharmaceutical.

20

EXAMPLE 27

A 100 ml solution for the adhesive layer was made using 45.1% by weight of water USP, 45% by weight of ethyl alcohol, 1.8% by weight hydroxyethyl cellulose, Natrosol® 99-250 L NF (Aqualon), 2.6% by weight polyacrylic acid, Noveon® AA1 USP (BF Goodrich),
25 4.5% sodium carboxymethyl cellulose, cellulose gum 7 LF PH (Aqualon), and 1% by weight terbutaline sulfate.

- 31 -

EXAMPLE 28

The film obtained following the example 25 is used as substrate for the final multilayer film of this example. The bioadhesive preparation of example 26 is directly casted on the film of example 25 and dried. Then the preparation of example 27 is cast on the top with a knife over roll system. The final four layer film is 0.240 mm. The composition of this film limits the release of terbutaline in the oral cavity but not completely as the pharmaceutical can still diffuse through the sides. In order to avoid this side diffusion, we have to changed slightly the design has previously mentioned.

EXAMPLE 29

The film obtained following the example 25 is used as substrate for the final multilayer film of this example. The bioadhesive preparation of example 26 is directly casted on the film of example 25 and dried. A trilayer film is thus obtained, the last layer being bioadhesive but not containing any drug. Then the preparation of example 27 is coated using a mask and dried (the mask is a 0.500 mm polyester film in which ellipsoids have been die cut deposited on the trilayer laminate). This step can be repeated if necessary. The mask is then delaminated. The resulting film is tri/four layers film composed of a laminate backing layer and a laminate bioadhesive layer in which the final component includes the pharmaceutical and is of a smaller surface as shown in figure . With this system, diffusion by either the sides or the back side is limited and allows an unidirectional release of the drug into the mucosal tissues.

EXAMPLE 30

Following the previous example but with fluocinonide instead of pilocarpine HCl, the same type of film is constructed using a screen coating technique instead of using a mask. Others techniques such as deposition of, spraying the solution or die cutting off the last layer are satisfactory.

- 32 -

CLAIMS:

1. A pharmaceutical carrier device comprising a layered film having a first water-erodable adhesive layer to be placed in contact with a mucosal surface, and a second, water-erodable non-adhesive backing layer, wherein said device is capable of having a pharmaceutical incorporated within said first layer, said second layer, or both layers.
5
2. The pharmaceutical carrier device of claim 1, wherein said first water-erodable adhesive layer comprises an alkyl cellulose or hydroxyalkyl cellulose and a bioadhesive polymer.
3. The pharmaceutical carrier device of claim 1, wherein said first water-erodable
10 adhesive layer comprises a film forming polymer selected from hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxypropylmethyl cellulose, hydroxyethyl methyl cellulose, polyvinyl alcohol, polyethylene glycol, polyethylene oxide, ethylene oxide-propylene oxide co-polymers, collagen and derivatives, gelatin, albumin, polyaminoacids and derivatives, polyphosphazenes, polysaccharides and derivatives, or chitin and chitosan, alone or in
15 combination, and a bioadhesive polymer selected from polyacrylic acid, polyvinyl pyrrolidone, or sodium carboxymethyl cellulose, alone or in combination.
4. The pharmaceutical carrier device of claim 1, wherein said second water-erodable non-adhesive backing layer comprises hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxyethylmethyl cellulose, hydroxypropylmethyl cellulose, polyvinyl alcohol,
20 polyethylene glycol, polyethylene oxide, or ethylene oxide-propylene oxide co-polymers, alone or in combination.
5. The pharmaceutical device of claim 1, wherein a pharmaceutical is present in said first water-erodable adhesive layer.
6. The pharmaceutical device of claim 1, wherein said layered film has two layers and a
25 total thickness of from 0.1 mm to 1 mm.
7. The pharmaceutical device of claim 1 which further comprises a third layer between said first adhesive layer and said second backing layer and wherein said third layer is a water-

- 33 -

erodable, adhesive layer which has a surface area sufficient to encompass said first adhesive layer and contact the mucosal surface.

8. The pharmaceutical device of claim 7, wherein a pharmaceutical is present in said first adhesive layer.

5 9. The pharmaceutical device of claim 1, wherein one or more of the layers further comprises a component which acts to adjust the kinetics of the erodability of the device.

10. The pharmaceutical device of claim 9 wherein the component is a water-based emulsion of polylactide, polyglycolide, lactide-glycolide copolymers, poly-ε-caprolactone and derivatives, polyorthoesters and derivatives, polyanhydrides and derivatives, ethyl
10 cellulose, vinyl acetate, cellulose acetate, or polyisobutylene, alone or in combination.

11. The pharmaceutical device of claim 9 wherein the component is alkyl-glycol, propylene glycol, polyethyleneglycol, oleate, sebacate, stearate or esters of glycerol, or phthalate.

12. The pharmaceutical device of claim 7, wherein one or more of the layers further
15 comprises a component which acts to adjust the kinetics of the erodability of the device.

13. The pharmaceutical device of claim 12 wherein the component is a water-based emulsion of polylactide, polyglycolide, lactide-glycolide copolymers, poly-ε-caprolactone and derivatives, polyorthoesters and derivatives, polyanhydrides and derivatives, ethyl cellulose, vinyl acetate, cellulose acetate, or polyisobutylene, alone or in combination.

20 14. The pharmaceutical device of claim 12 wherein the component is alkyl-glycol, propylene glycol, polyethyleneglycol, oleate, sebacate, stearate or esters of glycerol, or phthalate.

15. The pharmaceutical device of claim 1, wherein said pharmaceutical capable of being incorporated within said first layer, said second layer, or both layers comprises an anti-
25 inflammatory analgesic agent, a steroidal anti-inflammatory agent, an antihistamine, a local anesthetic, a bactericide, a disinfectant, a vasoconstrictor, a hemostatic, a chemotherapeutic drug, an antibiotic, a keratolytic, a cauterizing agent, an antiviral, an antirheumatic, an

- 34 -

antihypertensive, a bronchodilator, an anticholinergic, an antispasmodic compounds, a hormone, a macromolecule, a peptide, a protein, or a vaccine alone or in combination.

16. The pharmaceutical device of claim 1, wherein said first water-erodable adhesive layer comprises hydroxyethyl cellulose, polyacrylic acid, and sodium carboxymethyl cellulose; said second water-erodable non-adhesive backing layer comprises hydroxyethyl cellulose; and said pharmaceutical capable of being incorporated comprises dyclonine HCl.

17. A layered film disk which adheres to mucosal surfaces for the localized delivery of pharmaceutical, comprising a first adhesive layer and a second non-adhesive backing layer, said pharmaceutical or combination of pharmaceuticals present in said first adhesive layer, or said second non-adhesive backing layer, or both said first adhesive layer and said second non-adhesive backing layer, said layered film having a total thickness of from 0.1 mm to 1 mm.

18. The layered film disk of claim 17, wherein said pharmaceutical or combination of pharmaceuticals comprises an anti-inflammatory analgesic agent, a steroidal anti-inflammatory agent, an antihistamine, a local anesthetic, a bactericide, a disinfectant, a vasoconstrictor, a hemostatic, a chemotherapeutic drug, an antibiotic, a keratolytic, a cauterizing agent, an antiviral, an antirheumatic, an antihypertensive, a bronchodilator, an anticholinergic, an antispasmodic compounds, a hormone, a macromolecule, a peptide, a protein, or a vaccine, alone or in combination.

19. A method for treating mucosal surfaces, surrounding tissues, and bodily fluids, comprising applying an adherent film at the treatment site for the protection of said treatment site and delivery of pharmaceutical to said mucosal surface, said surrounding tissues, and said bodily fluids, said adherent film comprising a layered pharmaceutical carrier device which is water-erodable.

20. The method of claim 19, wherein said layered pharmaceutical carrier device comprises a first water-erodable adhesive layer and a second water-erodable non-adhesive backing layer, said first and second layers each having a thickness of from 0.01 mm to 0.9 mm.

- 35 -

21. The method of claim 20, wherein said layered carrier device further comprises a pharmaceutical incorporated within said first or second layer.

22. The method of claim 21, wherein said first water-erodable adhesive layer comprises a film forming polymer selected from hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxypropylmethyl cellulose, or hydroxyethylmethyl cellulose, alone or in combination, and a bioadhesive polymer selected from polyacrylic acid, polyvinyl pyrrolidone, or sodium carboxymethyl cellulose, alone or in combination.

23. The method of claim 22, wherein said second water-erodable non-adhesive backing layer comprises hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxyethylmethyl cellulose, hydroxypropylmethyl cellulose, polyvinyl alcohol, polyethylene glycol, polyethylene oxide, or ethylene oxide-propylene oxide co-polymers, alone or in combination.

24. The method of claim 23, wherein said pharmaceutical comprises an anti-inflammatory analgesic agent, a steroidal anti-inflammatory agent, an antihistamine, a local anesthetic, a bactericide, a disinfectant, a vasoconstrictor, a hemostatic, a chemotherapeutic drug, an antibiotic, a keratolytic, a cauterizing agent, an antiviral, an antirheumatic, an antihypertensive, a bronchodilator, an anticholinergic, an antimenimic compounds, a hormone, a macromolecule, a peptide, a protein, or a vaccine alone or in combination.

25. A method for treating wounds or burns of the skin comprising applying an adherent film at the treatment site for the protection of said treatment site and delivery of pharmaceutical to the skin, said adherent film comprising a layered pharmaceutical carrier device which is water-erodable.

26. The method of claim 25, wherein said layered pharmaceutical carrier device comprises a first water-erodable adhesive layer and a second water-erodable non-adhesive backing layer, said first and second layers each having a thickness of from 0.01 mm to 0.9 mm.

27. The method of claim 26, wherein said layered carrier device further comprises a pharmaceutical incorporated within said first or second layer.

- 36 -

28. The method of claim 27, wherein said first water-erodable adhesive layer comprises a film forming polymer selected from hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxypropylmethyl cellulose, or hydroxyethylmethyl cellulose, alone or in combination, and a bioadhesive polymer selected from polyacrylic acid, polyvinyl pyrrolidone, or sodium
5 carboxymethyl cellulose, alone or in combination.

29. The method of claim 28, wherein said second water-erodable non-adhesive backing layer comprises hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxyethylmethyl cellulose, hydroxypropylmethyl cellulose, polyvinyl alcohol, polyethylene glycol, polyethylene oxide, or ethylene oxide-propylene oxide co-polymers, alone or in combination.

10 30. The method of claim 29, wherein said pharmaceutical comprises an anti-inflammatory analgesic agent, a steroidal anti-inflammatory agent, an antihistamine, a local anesthetic, a bactericide, a disinfectant, a vasoconstrictor, a hemostatic, a chemotherapeutic drug, an antibiotic, a keratolytic, a cauterizing agent, an antiviral, an antirheumatic, an antihypertensive, a bronchodilator, an anticholinergic, an antimenimic compounds, a
15 hormone, a macromolecule, a peptide, a protein, or a vaccine alone or in combination.

1/1

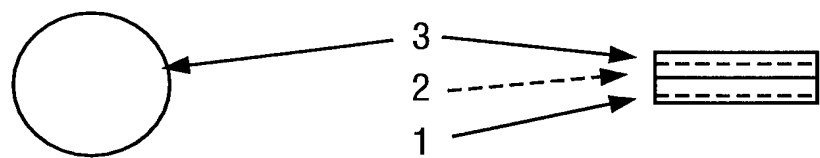


FIG.1

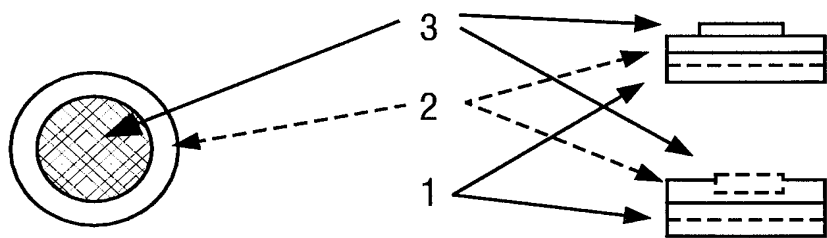


FIG.2

INTERNATIONAL SEARCH REPORT

Inter. .ional Application No

PCT/US 97/18605

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61K9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 582 942 A (YAMANOUCI TRADING) 12 December 1986 see claims 1,6,7 see page 5, line 1 - line 17 see page 6, line 13 - page 7, line 19 ---	1-6,9, 11,15, 17-30
X	EP 0 262 422 A (TEIKOKU SEIYAKU KABUSHIKI KAISHA) 6 April 1988 see claims 1,2,11,12 see page 3, line 35 - line 41 see examples 3,4 see figure 1 --- -/-	1-3, 9-11,15, 17-21, 25-30

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

18 December 1997

Date of mailing of the international search report

15/01/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ventura Amat, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/18605

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 159 604 A (TEIKOKU SEIYAKU TOYO BOSEKI KABUSHIKI KAISHA) 30 October 1985 see claim 4 see page 9, paragraph 2 ---	1-5,15, 17-30
A	FR 2 497 098 A (TEIJIN LIMITED) 2 July 1982 see claims 1,3,4,7-9 -----	1-30

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 97/18605

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2582942 A	12-12-86	JP 1717687 C	14-12-92
		JP 2060644 B	17-12-90
		JP 61280423 A	11-12-86
		DE 3618553 A	08-01-87
		GB 2177002 A,B	14-01-87
		US 4765983 A	23-08-88

EP 262422 A	06-04-88	JP 2063718 C	24-06-96
		JP 7094384 B	11-10-95
		JP 63060924 A	17-03-88
		CA 1302255 A	02-06-92
		DE 3778106 A	14-05-92
		US 4889720 A	26-12-89
		US 5196202 A	23-03-93

EP 159604 A	30-10-85	JP 1832298 C	29-03-94
		JP 5030808 B	11-05-93
		JP 60215622 A	29-10-85
		JP 1504244 C	28-06-89
		JP 60248609 A	09-12-85
		JP 63047687 B	26-09-88
		US 4740365 A	26-04-88

FR 2497098 A	02-07-82	JP 57110254 A	09-07-82
		JP 62000707 B	09-01-87
		US 4715369 A	29-12-87
